

# StroBell

## Combined Fire Bell & Strobe

A combined bell and strobe with high sound and light output to assist in the design of DDA-compliant fire systems.

Using the market leading aluminium gong for excellent sound output and a clear lens to maximise light output, the VimpeX StroBell is ideal for installations that call for a traditional bell tone but require visual alarm indication as well.

As with the VimpeX sounder range, all bells can be supplied branded with your company logo.




### Features

- Utilises market-leading bell design
- Ultra bright strobe in clear lens for maximum light output
- Familiar installation method
- Selectable flash rate - 30/60 per minute
- Low current consumption
- Single point of installation minimises wiring and associated costs

## Specification

Model No.:	SMBF-6EV
Rated Voltage:	24Vdc $\pm$ 20%
Starting Voltage:	16Vdc
Sound output @1m (max):	95dB(A)
Rated Current @ 24Vdc:	Bell only, 11mA
	30 flashes/min (0.5Hz), 30mA - 60 flashes/min (1.0Hz), 50mA
Light Output (at front):	>15 Candela
Flash Rate:	0.5 or 1.0 Hz selectable
Gong Colour:	Red
Gong construction:	Aluminium
IP Rating (minimum)	IP21 - For internal use only
Weight	579g
Operating Temperature Range	-20 to +55°C

## Installation

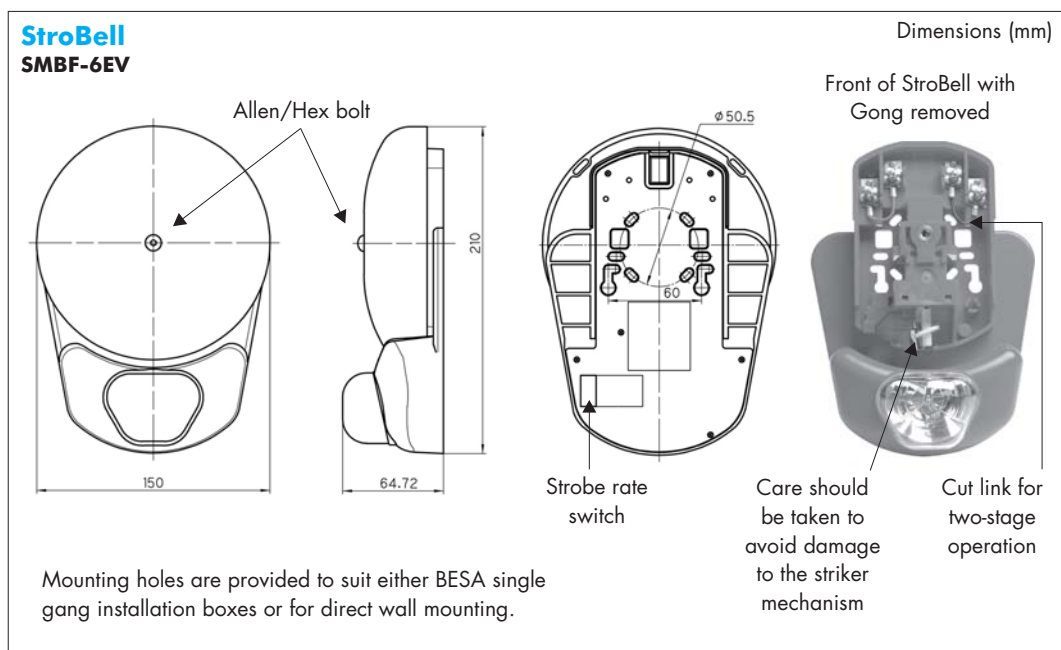

**VIMPEX**

### Vimpex Ltd

Star Lane, Great Wakering  
Essex, SS3 0PJ England.  
Tel: +44 (0) 1702 216999  
Fax: +44 (0) 1702 216699  
E-mail: sales@vimpex.co.uk

[www.vimpex.co.uk](http://www.vimpex.co.uk)



Quality System Certificate No. 456  
Assessed to ISO 9001:2000



We reserve the right to change or amend any design or specification in line with our policy of continuing development and improvement.

Part No: DS/STROBELL/ISS 3

## Other Products and Accessories



- Fire-Cryer® Voice Enhanced Sounders
- Electronic Sounders
- Beacons and Strobe Lights
- Sounder Accessories & Fire System Ancillaries
- Stopper Range of Vandal Deterrent Products
- Water Leakage Detection Systems