

VSP-101 Security Sounder

This compact 105dBA Security Sounder is designed as a stand alone unit for internal use. The unit is also capable of operating in an external protected environment such as polycarbonate bell boxes. The unit is surface mounted and is able to utilise square trunking.

The VSP-101 Security Sounder combines acoustic knowledge together with a high standard of styling and design.

Tamper switch will signal an alarm if either the housing is removed from the back plate or the whole unit is removed from its fixing.



Features


- Supply voltage 12 Vdc
- High output - 105dBA
- Low current - 60mA typical
- Dual action Anti-Tamper Switch
- Two selectable distinct tones
- Surface mounting - utilises BS4662 and 5733 wall boxes
- Designed to Comply with EN50131 Security Grade III & Environmental Class II



Specification

Description	Standard Security Sounder
Model No.	VSP-101
Operating Voltage (Vdc)	9.6 - 14.4
Rated Current - Typical (mA)	60
Sound Output dBA/m	105 (Constant or Ascending tone)
Tone Frequency (Hz)	2,000 - 3,200
Weatherproofing	Indoor only
Colour	White
Tamper (Wall and Housing)	Double-Tamper Switch conforming to EN50131 Pt 1 and Pt 4 Class 2
Connections	4 Way Terminal Block (2x 1.5mm for supply, 2x 1.5mm for Anti-Tamper Switch Contacts)

Installation

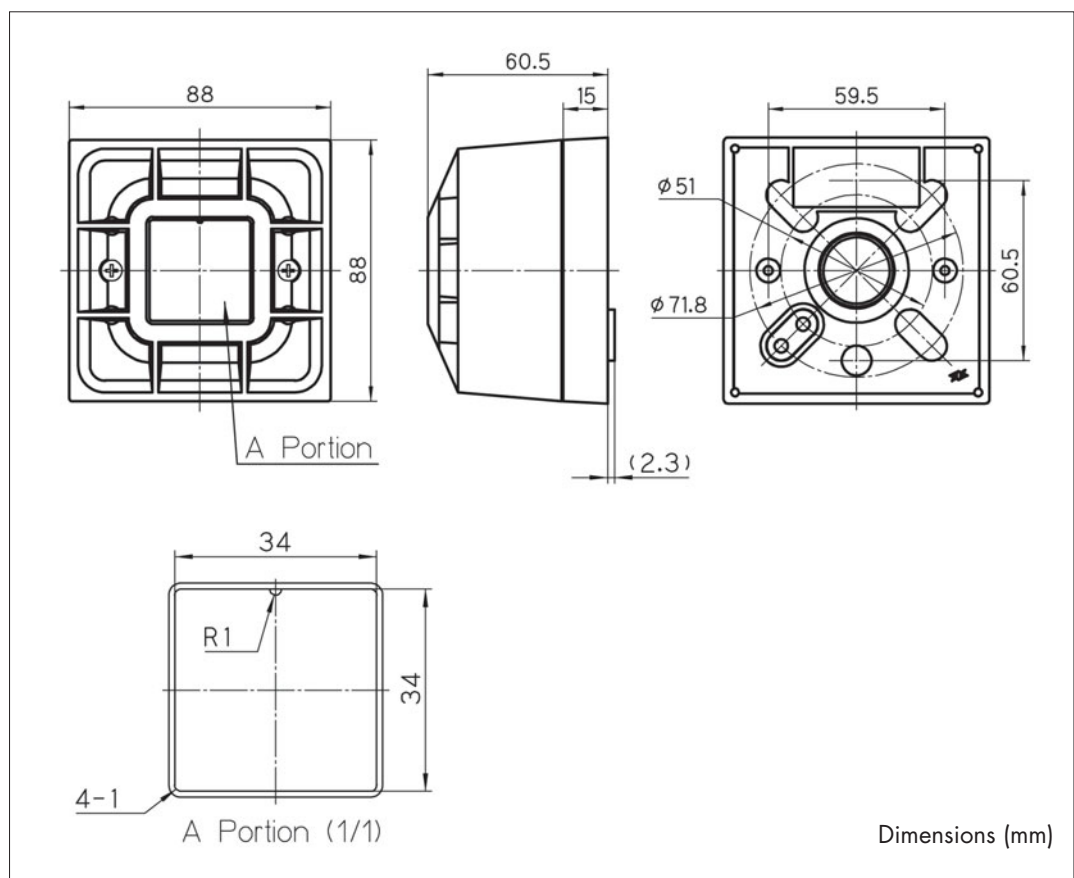

VIMPEX

Vimpex Ltd

Star Lane, Great Wakering
Essex, SS3 0PJ England.
Tel: +44 (0) 1702 216999
Fax: +44 (0) 1702 216699
E-mail: sales@vimpex.co.uk

www.vimpex.co.uk



Quality System Certificate No. 456
Assessed to ISO 9001:2000



We reserve the right to change or amend any design or specification in line with our policy of continuing development and improvement.

Part No: DS/VSP101/ISS 3

Other Products and Accessories



- Fire-Cryer® Voice Enhanced Sounders
- Electronic Sounders
- Beacons and Strobe Lights
- Sounder Accessories & Fire System Ancillaries
- Stopper Range of Vandal Deterrent Products
- Water Leakage Detection Systems