

GNExB2LD2 Explosion Proof LED Multifunction Beacon

The GNExB2LD2 is an IECEx & ATEX approved explosion proof high output LED multifunction beacon. The robust IP66 corrosion proof GRP enclosure and extended temperature range ensures the GNExB2LD2 is suitable for all Zone 1, 2, 21 & 22 hazardous location signalling applications.

The GNExB2LD2 utilises an array of high power Cree® LED's, orientated to optimise visibility in any direction. The beacon can be configured as a steady beacon for status indicator use, with a light output of up to 174 candela. Alternatively one of the five flashing modes, with a light output of up to 338 candela, may be used for warning applications. DC voltage versions feature three remotely selectable stages enabling multiple warnings to be signalled from one device. The field replaceable colour filter enhances the light output and is constructed from UV stable PC.

Features

- Robust, corrosion proof GRP (glass reinforced polyester) enclosure
- Ingress protection IP66
- Automatic synchronisation on multi-beacon systems
- Choice of five flash rates: 1Hz, 1.5Hz, 2Hz, double and triple flash.
- High and low power Steady modes
- Three remotely selectable stages/channels on DC versions.
- Glass lens & Stainless Steel guard
- UV stable PC field replaceable lens colour filter
- Stainless steel fixings
- Triple cable entries
- Duplicate cable terminations (in & out for daisy-chain installations)

Approvals

- IECEx UL 15.0003X
IEC 60079-0 : 2011
IEC 60079-1 : 2014
IEC 60079-31 : 2013
- ATEX DEMKO 15ATEX1448X
EN 60079-0 : 2012
EN 60079-1 : 2014
EN 60079-31 : 2014



Vimpex Limited


Star Lane, Great Wakering
Essex SS3 0PJ England

Tel: +44 (0) 1702 216999

Fax: +44 (0) 1702 216699

E-mail: sales@vimpex.co.uk

www.vimpex.co.uk

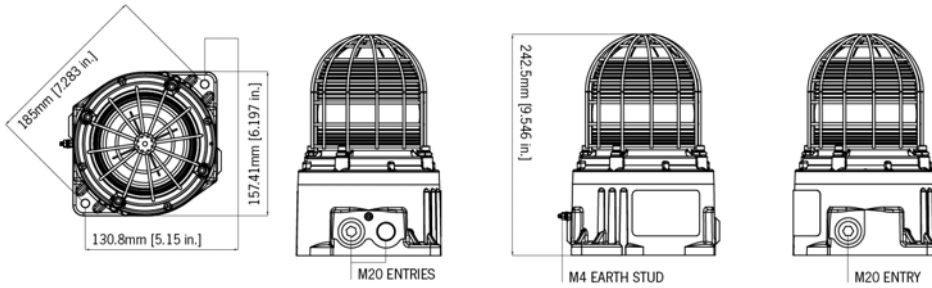

Specification

Source:	Array of 4 x High Power Cree® LED's
Modes:	1Hz flash (60 fpm) 1.5Hz flash (90 fpm) 2Hz flash (120 fpm) Double strike flash Triple strike flash High Power Steady Low Power Steady
Eff. Intensity cd:	174 cd - High Power Steady
Eff. Intensity cd:	338 cd - 1Hz flash
Lens colours:	Amber, Blue, Clear, Green, Magenta, Red & Yellow
Voltages DC:	24vdc
Voltages AC:	115Vac; 230Vac
Ingress protection:	IP66
Enclosure matl:	UV stable GRP (glass reinforced polyester)
Colour:	Natural Red - can be provided in alternative colours
Cable entries:	3 x M20 ISO (2 stopping plugs inc.) Adaptors to M25, 1/2" & 3/4" NPT can be specified
Terminals:	0.5 to 2.5mm ²
Enclosure volume:	<2 litres
Line monitoring:	Blocking diode included EOL Min. 500 Ohm 2w, or 3k3 Ohm 0.5w resistor or diode (DC versions) can be fitted
LED life:	60,000 Hours
Temperature range:	-50° to +70°C (-58°F to +158°F)
Weight:	3.5kg/7.7lbs

*All candela data is representative of performance with clear lens at optimum voltage.

Example part code: GNExB2LD2AC230 [e][m][s][V][x][y]
GNExB2LD2AC230AB1A1R/R
GNExB2LD2 LED Beacon, 230V ac,
3 x M20 entries, Brass stopping plugs,
A2 304 SS guard, IECEx & ATEX approved,
Red enclosure, Red lens

Part Codes

Version:	Part code:
Product type:	GNExB2
Type:	LD2 LED Multifunction Beacon
Voltage:	DC024 18-54V dc AC115 103.5-126.5V ac AC230 207-253V ac
Cable Entry Type: [e]	A 3 x M20x1.5mm B 2 x 1/2" NPT - adaptors C 2 x 3/4" NPT - adaptors D 2 x M25x1.5mm - adaptors E 1 x 1/2" NPT - adaptor F 1 x 3/4" NPT - adaptor G 1 x M25x1.5mm - adaptor H 3 x 1/2" NPT - adaptors I 3 x 3/4" NPT - adaptors J 3 x M25x1.5mm - adaptors
Adaptor/Stopping plug material: [m]	B Brass (standard) N Nickel Plated S Stainless Steel
Guard material: [s]	1 A2 304 Stainless (standard) 2 A4 316 Stainless Steel
Product version: [v]	A1 IECEx & ATEX Group II 2G/D Zone 1, 2, 21 & 22
Enclosure colour: [x]	R Red S Special (contact E2S)
Lens colour: [y]	A Amber B Blue C Clear G Green M Magenta R Red Y Yellow

Current Consumption

Version:	Voltage:	Steady High Power Current:	Steady Low Power Current:	Flashing 1Hz Current:
24V dc	18-54V dc	240mA	134mA	110mA
115V ac	103.5-126.5V ac 50/60Hz	95mA	78mA	90mA
230V ac	207-253V ac 50/60Hz	48mA	37mA	45mA

Vimpex Limited

Star Lane, Great Wakering
Essex SS3 0PJ England
Tel: +44 (0) 1702 216999
Fax: +44 (0) 1702 216699
E-mail: sales@vimpex.co.uk
www.vimpex.co.uk

Assemblies

The GNExB2LD2 is available as a plated assembly configured with up to 4 x Xenon strobe or LED beacons with a GNEJ2 Ex d junction box or 5 x beacons without a junction box. Contact E2S for further information.

Coding

- II 2G Ex db IIC Gb T6 Ta -50°C to +65°C
- II 2G Ex db IIC Gb T5 Ta -50°C to +70°C
- II 2D Ex tb IIIC Db T85°C Ta -50°C to +70°C

Multi-function patterns

Stage 1: [On board]	Stage 2: [Remote]	Stage 3: [Remote]
Steady High Power	Flashing 1Hz	Triple Strike
Steady Low Power	Flashing 1Hz	Triple Strike
Flashing 1Hz	2x Flash 2Hz	Triple Strike
Flashing 1.5Hz	Flashing 2Hz	Double Strike
Flashing 2Hz	Triple Strike	Triple Strike
Double Strike	Steady High Power	Triple Strike
Triple Strike	Flashing 2Hz	Double Strike

Note: Remote second and third stage on DC units only